

QL-Series Bolster High


Doc.no AD00091

Technical Details / Technische Daten

Max. Load Capacity 6-7 / 9-10 ton depending on stake.

Max. Beladefähigkeit pro Schemel beträgt: 6-7 / 9-10 tonnen


Weight (bolster only) 89,5 Kg

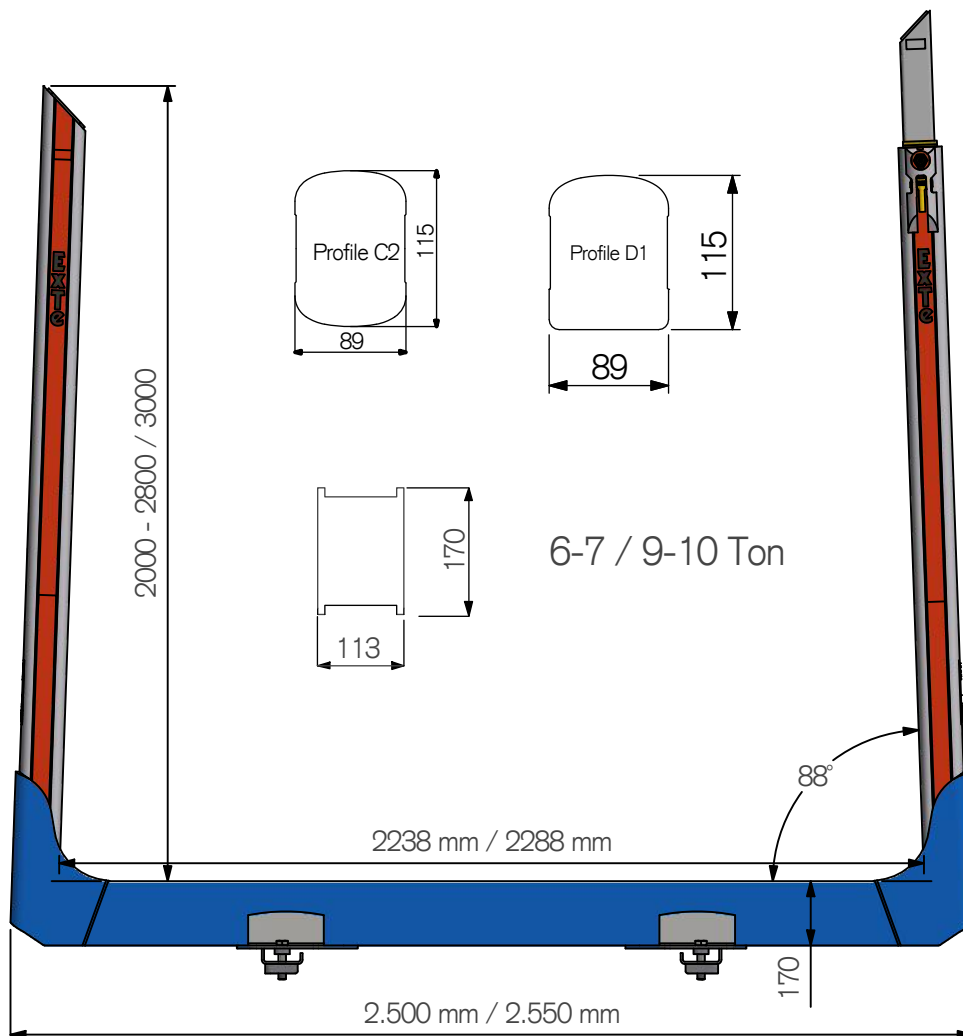

AD00091 2019-10-29

ExTe

Securing cargo. We invented the concept.

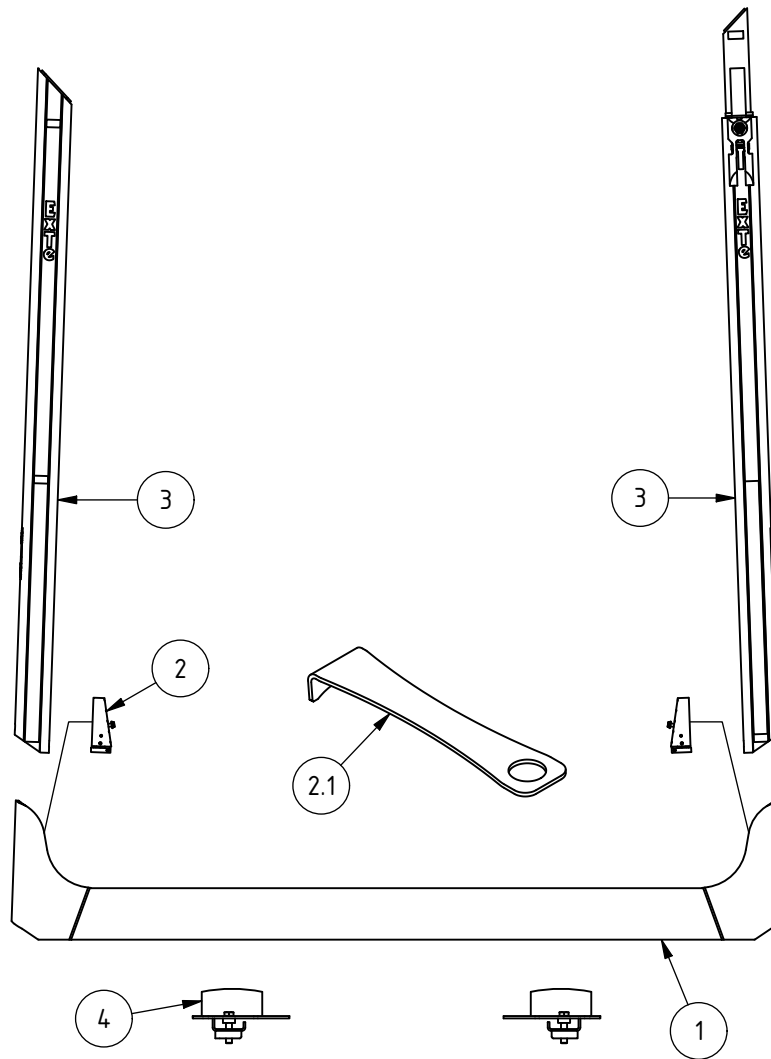

Pos.	Part.no	Pcs	Benämning	Description	Bezeichnung	Weight*
1	810967	1	Stomme QL hög 2,5m	Bolster	Schemelkörper	86,1 kg
1	810960	1	Stomme QL hög 2,55m	Bolster	Schemelkörper	87,4 kg
2	810990	2	Låselement QL D-Stake	QL Wedge D-profile	QL Keil D-profil	1,9 kg
2	810950	2	Låselement QL C-Stake	QL Wedge C-profile	QL Keil C-profil	1,9 kg
2.1	810944	1	Trampverktyg	Tool	Werkzeuge	1,4 kg
3		2	Teleskopstake *1	Telescopic Stake *1	Teleskoprunge *1	
3		2	Eurostake *1	Euro Stake *1	Euro Runge *1	
4		2	Fäste *2	Attachment *2	Befestigung *2	

*1 Available stakes

All Exte C and D-Stakes are available,
Euro, Conical-out, Telescopic, and Conical-in.
10-Ton stake rates the bunk as 10 ton.
9-Ton stake rates the bunk as 9 ton.
7-Ton stake rates the bunk as 7 ton.
6-Ton stake rates the bunk as 6 ton.

Please observe the maximum loading height depending on tonnage:
Maximum load height as 6-7 ton bunk: 2,8 m
Maximum load height as 9-10 ton bunk: 3,0 m

*2 Available mountings

All 144 / D / E-series mountings fit.

Rolling, friction, and fixed mounting.
Both as welded and bolted.

* Teoretiska

* Theoretical

* Theoretisch

ExTe

Securing cargo. We invented the concept.

ExTe Fabriks AB, SE-820 62 Färila Sweden. Tel: +46 (0)651 175 00. E-mail: info@exte.se www.exte.se